

Type 190x


Thread mill with GCT MicroSpeed Diamond Coating

Applications / Advantages:

- Ideally suited for internal thread milling in glass, quartz, technical ceramics such as Al_2O_3 , AlN, ZrO_2
- High dimensional accuracy and process capability due to **thicker diamond coating** and application-specific design



MicroSpeed diamond coating - Made by GCT in Germany

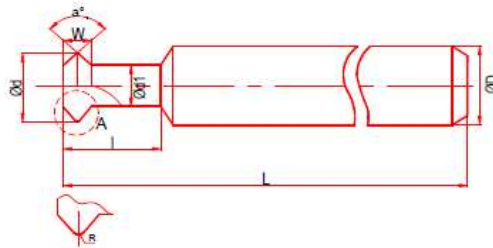

Metric Thread	Ød	Ød1	l	R	L	ØD
M1.6 x 0.35	1.20	0.85	5.0	0.03	38.10	3.00
M2 x 0.4	1.53	1.00	6.0	0.03	38.10	3.00
M2.5 x 0.45	1.97	1.37	7.0	0.03	38.10	3.00
M3 x 0.5	2.41	1.75	8.0	0.04	38.10	3.00
M4 x 0.7	3.17	2.25	10.0	0.05	38.10	3.00
M5 x 0.8	4.04	3.00	15.0	0.06	38.10	5.00
M6 x 1.0	4.80	3.60	15.0	0.07	38.10	5.00
M8 x 1.25	6.00	3.96	20.0	0.09	50.00	6.00

* Additional sizes and flute lengths made to order.

Standard Version:

- tolerances according to GCT specifications
- made of solid carbide

Manufactured by:

GCT, GmbH
Josef-Bayer-Srt.3
D-88250 Weingarten
Germany

Rev- 01/2022

Tel.: +49-(0) 751- 50 91 58 0
Fax: +49-(0) 751-50 91 58 99
E-Mail: info@gctool.com
www.gctool.com
Subject to technical changes



Distributed by:

Carbide Related Technologies, Inc.
355 Sackett Point Road, #5
North Haven, CT 06473
T-203-281-1266 F-203-248-9331
www.carbiderelatedtech.com
sales@carbiderelatedtech.com